




## ENTERPRISE X-SERIES

# Feature-Rich PCIe Gen 5 Enterprise Storage Solutions

The Phison X200 exists to support your diverse requirements in a single series. X200 delivers both single-port and dual-port modes while shipping in U.2 2.5" and E3.S form factors to give your data center reliable, and predictable performance that exceeds industry standards.

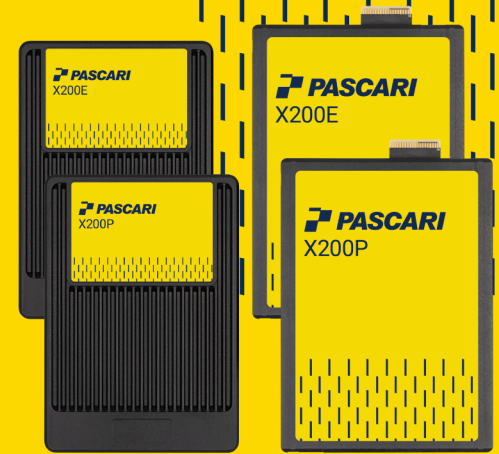

## Product Features

- PCIe 5.0 1x4 / 2x2 (Dual port)
- NVMe 2.0
- Capacity up to 30.72TB
- Form Factor: U.2 / E3.S
- DWPD: 1 / 3
- 128 Namespaces
- Power Loss Protection (PLP)
- ISE, TCG Opal 2.0 Support
- AES-XTS 256-bit Encryption
- End-to-End Data Path Protection
- Metadata Protection
- SECDED
- Sanitize
- NVMe-MI (Management Interface)
- SMBus

### Sequential Performance

Read 14,800 MB/s

Read 8,700K MB/s

### Random Performance

Read 3,000K IOPS

Write 900K IOPS

# Solution - X200E

Form Factor	<b>U.2</b>				
Capacity <sup>(1)</sup>	1.6TB	3.2TB	6.4TB	12.8TB	25.6TB
Interface	PCIe 5.0 1x4, 2x2	PCIe 5.0 1x4, 2x2	PCIe 5.0 1x4, 2x2	PCIe 5.0 1x4, 2x2	PCIe 5.0 1x4, 2x2
NVMe	2.0	2.0	2.0	2.0	2.0
NAND Flash	3D TLC	3D TLC	3D TLC	3D TLC	3D TLC
<b>Performance<sup>(2,3,4,6)</sup></b>					
Sequential Read(MB/s)	14,800	14,800	14,800	14,800	14,000 (Est.)
Sequential Write(MB/s)	4,300	8,600	8,700	8,350	7,500 (Est.)
4K Random Read(IOPS)	2,400K	3,000K	3,000K	3,000K	2,300K (Est.)
4K Random Write(IOPS)	400K	800K	900K	900K	630K (Est.)
Read Latency (Typ., µs)	60	60	60	60	60
Write Latency (Typ., µs)	10	10	10	10	10
<b>Power Consumption<sup>(5,6)</sup></b>					
Active (W)	<25	<25	<25	<25	<25
Idle (W)	5	5	5	5	5
<b>Endurance/Reliability</b>					
DWPD <sup>(7)</sup>	3	3	3	3	3
UBER	< 1 sector per 10 <sup>18</sup> bits read	< 1 sector per 10 <sup>18</sup> bits read	< 1 sector per 10 <sup>18</sup> bits read	< 1 sector per 10 <sup>18</sup> bits read	< 1 sector per 10 <sup>18</sup> bits read
MTBF (million hours)	2.5	2.5	2.5	2.5	2.5
Limited Warranty (years)	5	5	5	5	5
<b>Temperature</b>					
Operating Temp. (°C)	0 - 70	0 - 70	0 - 70	0 - 70	0 - 70
Non-Operating Temp. (°C)	-40 - 85	-40 - 85	-40 - 85	-40 - 85	-40 - 85
<b>Physical Dimension</b>					
Length (mm)	100.10	100.10	100.10	100.10	100.10
Width (mm)	69.85	69.85	69.85	69.85	69.85
Height (mm)	15.00	15.00	15.00	15.00	15.00
Weight (g)	188	199	201	168	<250
<b>Part Number</b>					
Single Port ISE FW	XP208H031T60E3 22T0410	XP208H033T20E3 24T0910	XP208H036T40E328 T1910	XP208H0312T8E3 116T310	XP208H0325T6E3 132T710
Single Port SED FW	XP208H031T60E2 22T0410	XP208H033T20E2 24T0910	XP208H036T40E228 T1910	XP208H0312T8E2 116T310	XP208H0325T6E2 132T710
Dual Port ISE FW	XX208H031T60E3 22T0410	X208H033T20E3 24T0910	X208H036T40E3 28T1910	X208H0312T8E31 16T310	X208H0325T6E31 32T710
Dual Port SED FW	XX208H031T60E2 22T0410	X208H033T20E2 24T0910	X208H036T40E2 28T1910	X208H0312T8E21 16T310	X208H0325T6E21 32T710

(1) 1 TB = 10<sup>12</sup> bytes.

(2) Sequential Performance is based on FIO on Linux, 128K, with QD=32, 1 worker.

(3) Random Performance is based on FIO on Linux, 4K data size, QD=64, 8 worker.

(4) Latency is measured with random workloads based on FIO on Linux, 4KB data size, QD=1, 1 worker.

(5) Power consumption is measured during the sequential read/write and random read/write operations performed by iometer with the conditions described in (2)(3).

(6) Performance measured based on high performance mode; power consumption measured based on standard mode.

(7) The results of DWPD are obtained in compliance with JESD219A Standards.



The data within this specification is subject to change by Phison without notice.  
Performance numbers may vary based on system configuration and testing conditions.  
Copyright © 2024 Phison Electronics. All rights reserved.

# Solution - X200E

Form Factor	E3.S			
Capacity <sup>(1)</sup>	1.6TB	3.2TB	6.4TB	12.8TB
Interface	PCIe 5.0 1x4, 2x2	PCIe 5.0 1x4, 2x2	PCIe 5.0 1x4, 2x2	PCIe 5.0 1x4, 2x2
NVMe	2.0	2.0	2.0	2.0
NAND Flash	3D TLC	3D TLC	3D TLC	3D TLC
<b>Performance<sup>(2,3,4,6)</sup></b>				
Sequential Read(MB/s)	14,800	14,800	14,800	14,800
Sequential Write(MB/s)	4,300	8,600	8,700	8,350
4K Random Read(IOPS)	2,400K	3,000K	3,000K	3,000K
4K Random Write(IOPS)	400K	800K	900K	900K
Read Latency (Typ., μs)	60	60	60	60
Write Latency (Typ., μs)	10	10	10	10
<b>Power Consumption<sup>(5,6)</sup></b>				
Active (W)	<25	<25	<25	<25
Idle (W)	5	5	5	5
<b>Endurance/Reliability</b>				
DWPD <sup>(7)</sup>	3	3	3	3
UBER	< 1 sector per 10 <sup>18</sup> bits read	< 1 sector per 10 <sup>18</sup> bits read	< 1 sector per 10 <sup>18</sup> bits read	< 1 sector per 10 <sup>18</sup> bits read
MTBF (million hours)	2.5	2.5	2.5	2.5
Limited Warranty (years)	5	5	5	5
<b>Temperature</b>				
Operating Temp. (°C)	0 - 70	0 - 70	0 - 70	0 - 70
Non-Operating Temp. (°C)	-40 - 85	-40 - 85	-40 - 85	-40 - 85
<b>Physical Dimension</b>				
Length (mm)	112.75	112.75	112.75	112.75
Width (mm)	76.00	76.00	76.00	76.00
Height (mm)	7.50	7.50	7.50	7.50
Weight (g)	TBD	TBD	TBD	TBD
<b>Part Number</b>				
Single Port ISE FW	XP20DH031T60E3 12T0410	XP20DH033T20E3 14T0910	XP20DH036T40E3 18T1910	XP20DH0312T8E3 116T310
Single Port SED FW	XP20DH031T60E2 12T0410	XP20DH033T20E2 14T0910	XP20DH036T40E2 18T1910	XP20DH0312T8E2 116T310
Dual Port ISE FW	X20DH031T60E3 12T0410	X20DH033T20E3 14T0910	X20DH036T40E3 18T1910	X20DH0312T8E3 116T310
Dual Port SED FW	X20DH031T60E2 12T0410	X20DH033T20E2 14T0910	X20DH036T40E2 18T1910	X20DH0312T8E2 116T310

(1) 1 TB = 10<sup>12</sup> bytes.

(2) Sequential Performance is based on FIO on Linux, 128K, with QD=32, 1 worker.

(3) Random Performance is based on FIO on Linux, 4K data size, QD=64, 8 worker.

(4) Latency is measured with random workloads based on FIO on Linux, 4KB data size, QD=1, 1 worker.

(5) Power consumption is measured during the sequential read/write and random read/write operations performed by iometer with the conditions described in (2)(3).

(6) Performance measured based on high performance mode; power consumption measured based on standard mode.

(7) The results of DWPD are obtained in compliance with JESD219A Standards.



The data within this specification is subject to change by Phison without notice.  
Performance numbers may vary based on system configuration and testing conditions.  
Copyright © 2024 Phison Electronics. All rights reserved.

# Solution - X200P

Form Factor	<b>U.2</b>				
Capacity <sup>(1)</sup>	1.92TB	3.84TB	7.68TB	15.36TB	30.72TB
Interface	PCIe 5.0 1x4, 2x2	PCIe 5.0 1x4, 2x2	PCIe 5.0 1x4, 2x2	PCIe 5.0 1x4, 2x2	PCIe 5.0 1x4, 2x2
NVMe	2.0	2.0	2.0	2.0	2.0
NAND Flash	3D TLC	3D TLC	3D TLC	3D TLC	3D TLC
<b>Performance<sup>(2,3,4,6)</sup></b>					
Sequential Read(MB/s)	14,800	14,800	14,800	14,800	14,000 (Est.)
Sequential Write(MB/s)	4,300	8,600	8,700	8,350	7,500 (Est.)
4K Random Read(IOPS)	2,400K	3,000K	3,000K	3,000K	2,300K (Est.)
4K Random Write(IOPS)	170K	380K	500K	500K	283K (Est.)
Read Latency (Typ., µs)	60	60	60	60	60
Write Latency (Typ., µs)	10	10	10	10	10
<b>Power Consumption<sup>(5,6)</sup></b>					
Active (W)	<25	<25	<25	<25	<25
Idle (W)	5	5	5	5	5
<b>Endurance/Reliability</b>					
DWPD <sup>(7)</sup>	1	1	1	1	1
UBER	< 1 sector per 10 <sup>18</sup> bits read	< 1 sector per 10 <sup>18</sup> bits read	< 1 sector per 10 <sup>18</sup> bits read	< 1 sector per 10 <sup>18</sup> bits read	< 1 sector per 10 <sup>18</sup> bits read
MTBF (million hours)	2.5	2.5	2.5	2.5	2.5
Limited Warranty (years)	5	5	5	5	5
<b>Temperature</b>					
Operating Temp. (°C)	0 - 70	0 - 70	0 - 70	0 - 70	0 - 70
Non-Operating Temp. (°C)	-40 - 85	-40 - 85	-40 - 85	-40 - 85	-40 - 85
<b>Physical Dimension</b>					
Length (mm)	100.10	100.10	100.10	100.10	100.10
Width (mm)	69.85	69.85	69.85	69.85	69.85
Height (mm)	15.00	15.00	15.00	15.00	15.00
Weight (g)	188	199	201	168	<250
<b>Part Number</b>					
Single Port ISE FW	XP208H031T92P3 22T0410	XP208H033T84P3 24T0910	XP208H037T68P3 28T1910	XP208H0315T3P3 116T310	XP208H0330T7P3 132T710
Single Port SED FW	XP208H031T92P2 22T0410	XP208H033T84P2 24T0910	XP208H037T68P2 28T1910	XP208H0315T3P2 116T310	XP208H0330T7P2 132T710
Dual Port ISE FW	X208H031T92P3 22T0410	X208H033T84P3 24T0910	X208H037T68P3 28T1910	X208H0315T3P31 16T310	X208H0330T7P31 32T710
Dual Port SED FW	X208H031T92P2 22T0410	X208H033T84P2 24T0910	X208H037T68P2 28T1910	X208H0315T3P21 16T310	X208H0330T7P21 32T710

(1) 1 TB = 10<sup>12</sup> bytes.

(2) Sequential Performance is based on FIO on Linux, 128K, with QD=32, 1 worker.

(3) Random Performance is based on FIO on Linux, 4K data size, QD=64, 8 worker.

(4) Latency is measured with random workloads based on FIO on Linux, 4KB data size, QD=1, 1 worker.

(5) Power consumption is measured during the sequential read/write and random read/write operations performed by iometer with the conditions described in (2)(3).

(6) Performance measured based on high performance mode; power consumption measured based on standard mode.

(7) The results of DWPD are obtained in compliance with JESD219A Standards.



The data within this specification is subject to change by Phison without notice. Performance numbers may vary based on system configuration and testing conditions. Copyright © 2024 Phison Electronics. All rights reserved.

# Solution - X200P

Form Factor	E3.S			
Capacity <sup>(1)</sup>	1.92TB	3.84TB	7.68TB	15.36TB
Interface	PCIe 5.0 1x4, 2x2	PCIe 5.0 1x4, 2x2	PCIe 5.0 1x4, 2x2	PCIe 5.0 1x4, 2x2
NVMe	2.0	2.0	2.0	2.0
NAND Flash	3D TLC	3D TLC	3D TLC	3D TLC
<b>Performance<sup>(2,3,4,6)</sup></b>				
Sequential Read(MB/s)	14,800	14,800	14,800	14,800
Sequential Write(MB/s)	4,300	8,600	8,700	8,350
4K Random Read(IOPS)	2,400K	3,000K	3,000K	3,000K
4K Random Write(IOPS)	170K	380K	500K	500K
Read Latency (Typ., μs)	60	60	60	60
Write Latency (Typ., μs)	10	10	10	10
<b>Power Consumption<sup>(5,6)</sup></b>				
Active (W)	<25	<25	<25	<25
Idle (W)	5	5	5	5
<b>Endurance/Reliability</b>				
DWPD <sup>(7)</sup>	3	3	3	3
UBER	< 1 sector per 10 <sup>18</sup> bits read	< 1 sector per 10 <sup>18</sup> bits read	< 1 sector per 10 <sup>18</sup> bits read	< 1 sector per 10 <sup>18</sup> bits read
MTBF (million hours)	2.5	2.5	2.5	2.5
Limited Warranty (years)	5	5	5	5
<b>Temperature</b>				
Operating Temp. (°C)	0 - 70	0 - 70	0 - 70	0 - 70
Non-Operating Temp. (°C)	-40 - 85	-40 - 85	-40 - 85	-40 - 85
<b>Physical Dimension</b>				
Length (mm)	112.75	112.75	112.75	112.75
Width (mm)	76.00	76.00	76.00	76.00
Height (mm)	7.50	7.50	7.50	7.50
Weight (g)	TBD	TBD	TBD	TBD
<b>Part Number</b>				
Single Port ISE FW	XP20DH031T92P3 12T0410	XP20DH033T84P3 14T0910	XP20DH037T68P3 18T1910	XP20DH0315T3P31 16T310
Single Port SED FW	XP20DH031T92P2 12T0410	XP20DH033T84P2 14T0910	XP20DH037T68P2 18T1910	XP20DH0315T3P21 16T310
Dual Port ISE FW	XX20DH031T92P3 12T0410	XX20DH033T84P3 14T0910	XX20DH037T68P3 18T1910	XX20DH0315T3P31 16T310
Dual Port SED FW	XX20DH031T92P2 12T0410	XX20DH033T84P2 14T0910	XX20DH037T68P2 18T1910	XX20DH0315T3P21 16T310

(1) 1 TB = 10<sup>12</sup> bytes.

(2) Sequential Performance is based on FIO on Linux, 128K, with QD=32, 1 worker.

(3) Random Performance is based on FIO on Linux, 4K data size, QD=64, 8 worker.

(4) Latency is measured with random workloads based on FIO on Linux, 4KB data size, QD=1, 1 worker.

(5) Power consumption is measured during the sequential read/write and random read/write operations performed by iometer with the conditions described in (2)(3).

(6) Performance measured based on high performance mode; power consumption measured based on standard mode.

(7) The results of DWPD are obtained in compliance with JESD219A Standards.



The data within this specification is subject to change by Phison without notice.  
Performance numbers may vary based on system configuration and testing conditions.  
Copyright © 2024 Phison Electronics. All rights reserved.